



MODEL: MT5461D01-1

Ver. 1.3

Date: 09.Jan.2013

Customer's Approval		CSOT	
Signature	Date	Approved By Product Director	Date
		Name:	
		Signature:	
Signature	Date	Reviewed By PM Manager	Date
		Name:	
		Signature:	
Signature	Date	Reviewed By Project Leader	Date
		Name:	
		Signature:	
Signature	Date	Reviewed By PM	Date
		Name:	
		Signature:	

Contents

Revision History	4
1. General Description	5
1.1 Product Features	5
1.2 Overview	5
1.3 General Information	5
2. Absolute Maximum Ratings	6
2.1 Absolute Maximum Ratings ($T_a = 25 \pm 2^\circ\text{C}$)	6
2.2 Environment Requirement	6
2.3 Package Storage	7
3. Electrical Specification	8
3.1 Electrical Characteristics	8
3.1.1 Power Consumption ($T_a = 25 \pm 2^\circ\text{C}$)	8
3.1.2 V by one Characteristics	9
3.1.3 V by one Input Signal Timing	10
3.2 Backlight Converter Unit	11
3.2.1 LED Converter Electrical Characteristics ($T_a = 25 \pm 2^\circ\text{C}$)	11
3.2.2 LED Converter Power Sequence	13
4. Input Terminal Pin Assignment	14
4.1 TFT LCD Module	14
4.2 Converter Unit	16
4.2.1 Converter Input Connector Pin Definition	16
4.3 4K2K Data Format	17
4.4 Color Data Input Assignment	19
5. V-by-One Each Lane Timing Spec	20
5.1 Timing Table (DE Only Mode)	20
5.2 Power On/Off Sequence	22
5.2.1 Power On/Off Sequence	22
6. Optical Characteristics	25
6.1 Measurement Conditions	25
6.2 Optical Specifications	26
7. Mechanical Characteristics	31
7.1 Mechanical Specification	31
7.2 Packing	32
7.2.1 Packing Specifications	33
7.2.2 Packing Method	33
8. Definition of Labels	35

8.1 Module Label.....	35
8.2 Carton Label	35
8.3 Pallet Label	36
9. Precautions	37
9.1 Assembly and Handling Precautions.....	37
9.2 Safety Precautions.....	37

CSOT
Confidential

Revision History

Version	Date	Page (New)	Section	Description	Revision by
Ver. 0.1	15.Oct.2012	37	All	Tentative Specification was First Issued.	Chenguo Wu
Ver. 1.1	1.Dec.2012	37	All	Preliminary Specification was First Issued	Chenguo Wu
Ver. 1.2	12.Dec.2012	26	6.2	Modify Center Luminance.	Chenguo Wu
Ver. 1.3	9.Jan.2013	31	7.1	Update Mechanical Specification.	Chenguo Wu

CSOT
Confidential

1. General Description

1.1 Product Features

- QFHD Resolution (3840 x 2160)—2D
- 4K1K Resolution (3840 x 1080)—3D
- High Brightness: 400 cd / m²—2D, 50 cd / m²—3D
- Very High Contrast Ratio: 4000:1
- Fast Response Time
- High Color Saturation: 72 % NTSC
- Ultra Wide Viewing Angle: 178° (H) / 178° (V) (CR ≥ 10)
- Low Power Consumption: Typ. 135 W
- DE (Data Enable) Mode
- V by One Interface

1.2 Overview

MT5461D01-1 is a diagonal 54.6" color active matrix LCD module with edge LED backlight and 8 lanes V by one interface. This module is a transmissive type display operating in the normally black mode. It supports 3840 x 2160 QFHD resolution and can display up to 1073.7M colors (10bit). Each pixel is divided into Red, Green and Blue sub-pixels which are arranged in vertical stripe. The converter of backlight is built-in.

This module dedicates for LCD TV products and provides excellent performance which includes high brightness, ultra wide viewing angle, high color saturation and high color depth.

1.3 General Information

Item	Specification	Unit	Note
Active Area	1209.6 (H) x 680.4 (V)	mm	
Bezel Opening Area	1215.8 (H) x 686.6 (V)	mm	
Outline Dimension	1225.8 (H) x 696.6 (V) x 15.1 (D)	mm	D: From Bezel to Rear
Weight	16	kg	Max.
Driving Scheme	a-Si TFT Active Matrix	-	
Number of Pixels	3840 x 2160	pixel	
Pixel Pitch (Sub Pixel)	0.105 (H) x 0.315 (V)	mm	
Pixel Arrangement	RGB Vertical Stripe	-	
Display Colors	1073.7M	color	10bit
Display Mode	Transmissive Mode, Normally Black	-	
Surface Treatment	Anti-glare, Haze 2%, Hard Coating (3H)	-	
Luminance of White	400—2D, 50—3D	cd/m ²	Center Point, Typ.

2. Absolute Maximum Ratings

2.1 Absolute Maximum Ratings ($T_a = 25 \pm 2 \text{ }^{\circ}\text{C}$)

The followings are maximum values which, if exceeded, may cause damage to the unit.

Item	Symbol	Value		Unit
		Min.	Max.	
Power Supply Voltage	V_{CC}	-0.3	14.0	V
Input Signal Voltage	V_{IN}	-0.3	4.0	V
Light Bar Voltage	$V_{W(2D)}$	58	69	V_{RMS}
	$V_{W(3D)}$	71	77	
Converter Input Voltage	V_{BL}	0	30	V
Control Signal Level	-	-0.3	7.0	V

2.2 Environment Requirement

(1) Temperature and relative humidity range are shown as below.

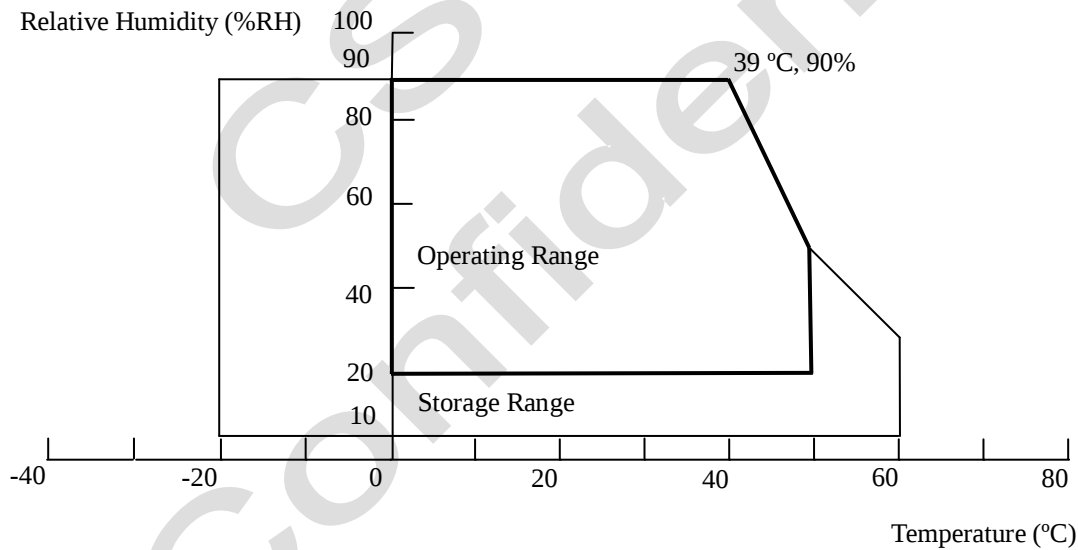


Fig. 2.1 Operating and storage environment

- (a) 90%RH maximum ($T_a \leq 39 \text{ }^{\circ}\text{C}$).
- (b) Wet-bulb temperature should be 39 °C maximum ($T_a > 39 \text{ }^{\circ}\text{C}$).
- (c) No condensation.

(2) The storage temperature is between - 20 °C to 60 °C, and the operating ambient temperature is between 0 °C to 50 °C.

The maximum operating temperature is based on the test condition that the surface temperature of display area is less than or equal to 65 °C with LCD module in a temperature controlled chamber alone. Thermal management should be considered in final product design to prevent the surface temperature of display area from being over 65 °C. The range of operating temperature may degrade in case of improper thermal management in the end product design.

(3) The TFT module including glass should be avoided any shock or vibration.

While testing shock and vibration, the fixture holding the module should be assured to be hard and rigid enough to prevent the module twisted or bent by the fixture. The test conditions should be less than:

Shock (Non-operating): 35 G, 11 ms, half sine wave, 1 time for $\pm X$, $\pm Y$, $\pm Z$.

Vibration (Non-operating): Random 1.0 Grms, 10 ~ 200 Hz, 10 min, 1 time for each X, Y, Z.

2.3 Package Storage

When storing modules as spares for a long time, please follow the precaution instructions:

- (1) Do not store the module in high temperature and high humidity for a long time. It is highly recommended to store the module with temperature from 0 °C to 35 °C in normal humidity.
- (2) The module shall be stored in a dark area and avoided to be exposed in direct sunlight or fluorescent light.

CSOT
Confidential

3. Electrical Specification

3.1 Electrical Characteristics

3.1.1 Power Consumption ($T_a = 25 \pm 2 \text{ }^{\circ}\text{C}$)

Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Power Supply Voltage		V_{CC}	10.8	12.0	13.2	V	(1)
Rush Current		I_{RUSH}	-	-	4	A	(2)
Power Supply Current	White Pattern	I_{CC}	-	-	1.1	A	(3)
	Horizontal Stripe	I_{CC}	-	-	3	A	
	Black Pattern	I_{CC}	-	-	1.1	A	

Note:

(1) The ripple voltage should be controlled less than 10% of V_{CC} .

(2) Measurement condition: V_{CC} rising time = 470 μs .

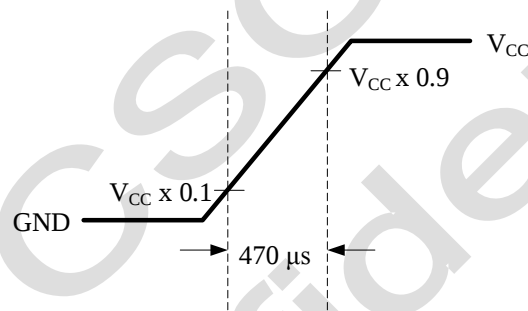



Fig. 3.1 V_{CC} rising time condition

(3) Measurement condition: $V_{CC} = 12 \text{ V}$, $T_a = 25 \pm 2 \text{ }^{\circ}\text{C}$, $F = 120 \text{ Hz}$. The test patterns are shown as below.

A. White Pattern



B. Horizontal Pattern

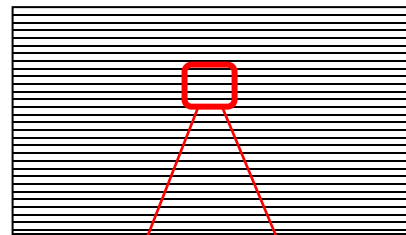

C. Black Pattern




Fig. 3.2 Test patterns

3.1.2 V by One Characteristics

Parameter		Symbol	Value			Unit
			Min.	Typ.	Max.	
V by one Interface	Differential Input High Threshold Voltage	V_{TH}	-	-	+50	mV
	Differential Input Low Threshold Voltage	V_{TL}	- 50	-	-	mV
	Common Input Voltage	V_{CM}	-	-	-	V
	Differential Input Voltage	$ V_{ID} $	-	-	-	mV
	Terminating Resistor	R_T	90	100	110	ohm
CMOS Interface	Input High Threshold Voltage	V_{IH}	2.4	-	3.3	V
	Input Low Threshold Voltage	V_{IL}	-	-	0.6	V

3.1.3 V by One Input Signal Timing

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Unit Interval (VBO Operation Bit Rate)	tRBIT	3-byte	380	tTCIP/30	1667	PS
		4-byte	285	tTCIP /40	1250	PS
		5-byte	266	tTCIP /50	1000	PS
Eye Width At Package Pin	tREYE	-	-	0.5	-	UI
Eye Width Position A at Package Pin	tA	-	-	0.25	-	UI
Eye Width Position B at Package Pin	tB	-	-	0.3	-	UI
Eye Width Position C at Package Pin	tC	-	-	0.7	-	UI
Eye Width Position D at Package Pin	tD	-	-	0.75	-	UI
Eye Width Position E at Package Pin	tE	-	-	0.7	-	UI
Eye Width position F at Package Pin	tF	-	-	0.3	-	UI
Intra-pair Skew	TTOSK_intra	-	-0.3	-	0.3	UI
Inter-pair Skew	TTOSK_inter	-	-500	-	500	UI

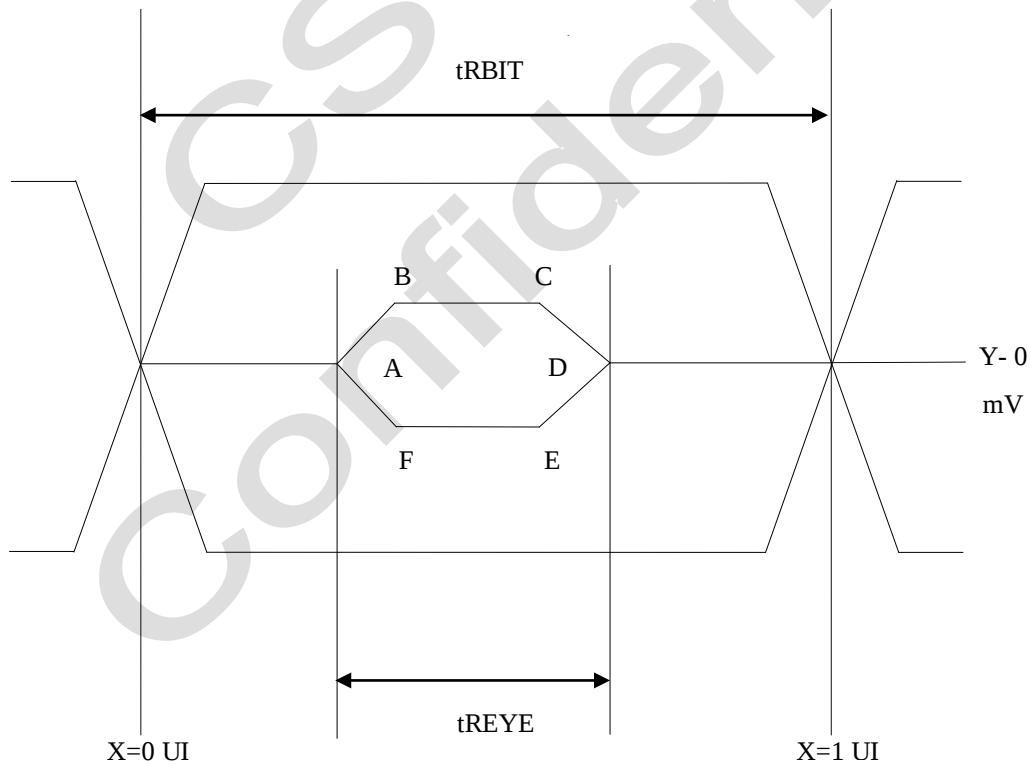


Fig. 3.3 V by one input signal timing

3.2 Backlight Converter Unit

3.2.1 LED Converter Electrical Characteristics (Ta = 25 ± 2 °C)

Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Power Consumption		P _{BL(2D)}	-	124.6	143.3	W _{att}	No dimming
		P _{BL(3D)}	-	76	84.2	W _{att}	
Input Voltage		V _{BL}	22.8	24.0	25.2	V	
Input Current		I _{BL(2D)}	-	5.19	6.63	A	No dimming
		I _{BL(3D)}	-	3.17	3.69	A	
Input Inrush Current		I _{RS-VIN}	-	-	5	A	(1)
		I _{RS-EN}	-	-	12	A	(2)
On/Off Control Voltage	On	V _{BLOn}	2.5	3.3	3.6	V	
	Off		0.0	-	0.8	V	
On/Off Control Current	-	I _{BLOn}	-	-	1.5	mA	
PWM Dimming Control Voltage	Max.	V _{PDIM}	2.5	3.3	3.6	V	
	Min.		0.0	-	0.8	V	
External PWM Control Current		I _{P-DIM}	-	-	2	mA	
PWM Dimming Frequency		F _{PWM}	150	160	170	Hz	
Dimming Duty Ratio		D _{DIM}	10	-	100	%	(3)
DET Status Signal		DET HI	Open Collector				
		DET Low	0		0.8	V	
Input Impedance		R _{IN}	300			Kohm	

Note:

- (1) The measurement condition: V_{BL} rising time is 20 ms. (V_{BL} from 10% ~ 90%)
- (2) The measurement condition: the V_{BL} = 24V, and then on the V_{BLOn} = 3.3V.
- (3) Less than 10% dimming control is functional well and no backlight happens to shut down.

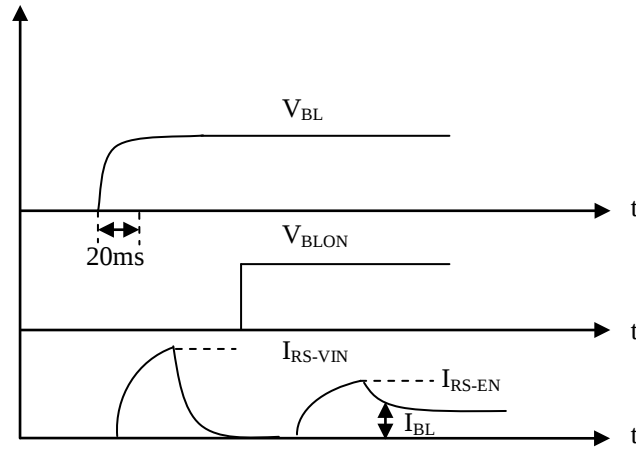


Fig. 3.4 The timing sequence diagram of inrush current measurement

3.2.2 LED Converter Power Sequence

No	ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARK
1	VBL Rising Time	Tr	20	-	-	ms	See Fig.3.5
2	VBL Falling Time	Tf	20	-	-	ms	
3	VBLON Rising Time	Tr1	-	-	100	ms	
4	VBLON Falling Time	Tf1	-	-	100	ms	
5	VBL to VP_DIM Delay Time	T1	500	-	-	ms	
6	BLON Delay Time	T2	250	-	-	ms	
7	BLON Off Time	T3	0	-	-	ms	
8	VP_DIM Off Time	T4	250	-	-	ms	

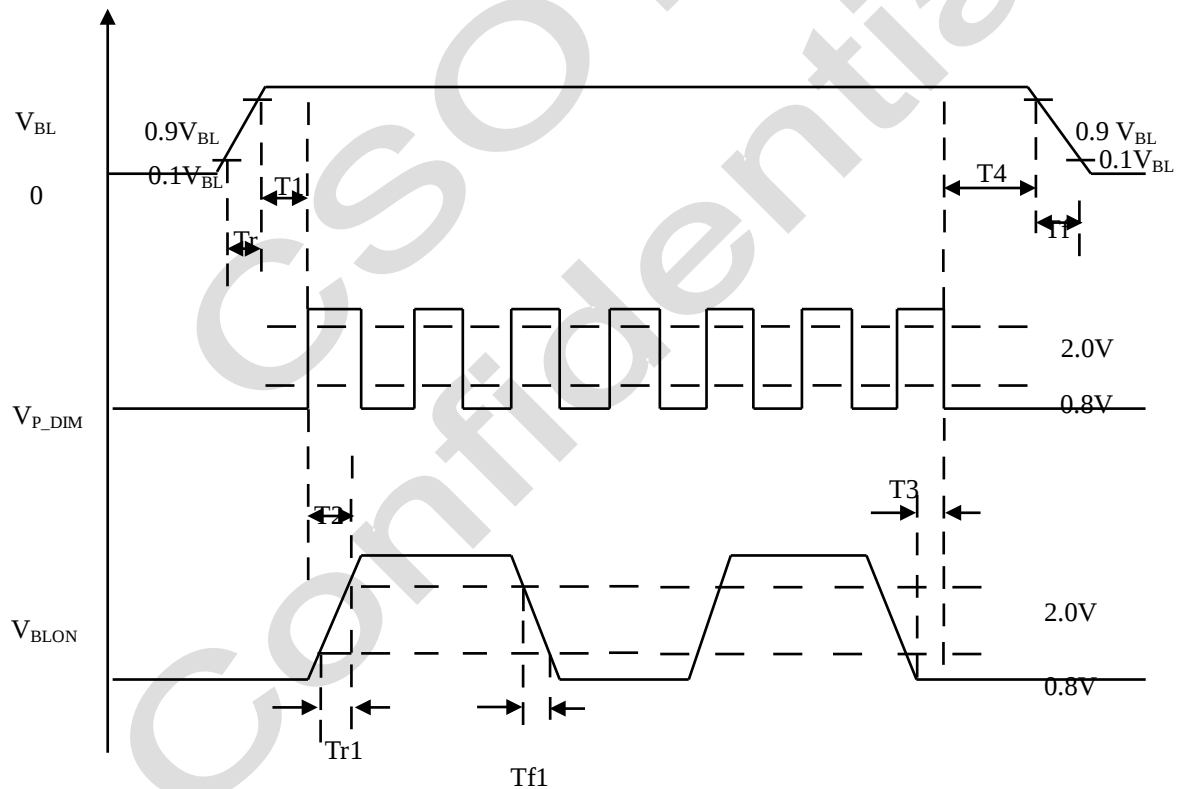


Fig. 3.5 The power sequence of V_{BL} and V_{BLON}

Note: The power sequence.

POWER ON: V_{BL} > V_{P_DIM} > V_{BLON}

V_{BL} > any other single(sync, 3D_EN, 2D/3D)

POWER OFF: V_{BLON} >= V_{P_DIM} > V_{BL}

Any other single(sync, 3D_EN, 2D/3D) > V_{BL}

4. Input Terminal Pin Assignment

4.1 TFT LCD Module

CN1: CT000041-513C (P-TWO)

Pin No.	Symbol	Description	Note
1	VIN12	Power 12V in	(1)
2	VIN12	Power 12V in	(1)
3	VIN12	Power 12V in	(1)
4	VIN12	Power 12V in	(1)
5	VIN12	Power 12V in	(1)
6	VIN12	Power 12V in	(1)
7	VIN12	Power 12V in	(1)
8	NC		(1)
9	GND	Ground	(1)
10	GND	Ground	(1)
11	Rx0N	Vx1 Lane0-	(1)
12	Rx0P	Vx1 Lane0+	(1)
13	GND	Ground	(1)
14	Rx1N	Vx1 Lane1-	(1)
15	Rx1P	Vx1 Lane1+	(1)
16	GND	Ground	(1)
17	Rx2N	Vx1 Lane2-	(1)
18	Rx2P	Vx1 Lane2+	(1)
19	GND	Ground	(1)
20	Rx3N	Vx1 Lane3-	(1)
21	Rx3P	Vx1 Lane3+	(1)
22	GND	Ground	(1)
23	HTPDN	Hot Plug Detect	(1)
24	LOCKN	Lock Detect	(1)
25	GND	Ground	(1)
26	Rx4N	Vx1 Lane4-	(1)
27	Rx4P	Vx1 Lane4+	(1)
28	GND	Ground	(1)
29	Rx5N	Vx1 Lane5-	(1)
30	Rx5P	Vx1 Lane5+	(1)
31	GND	Ground	(1)
32	Rx6N	Vx1 Lane6-	(1)
33	Rx6P	Vx1 Lane6+	(1)

34	GND	Ground	(1)
35	Rx7N	Vx1 Lane7-	(1)
36	Rx7P	Vx1 Lane7+	(1)
37	GND	Ground	(1)
38	3D_SYNC_I	Shutter Glass Sync Input Signal	(1)
39	3D_SYNC_O	Shutter Glass Sync Signal	(1)
40	3D_EN	3D_EN Signal	(1)
41	NC		(2)
42	NC		(2)
43	NC		(2)
44	NC		(2)
45	NC		(2)
46	NC		(2)
47	NC		(2)
48	NC		(2)
49	NC		(2)
50	NC		(2)
51	NC		(2)

Note:

(1)The direction of pin assignment is shown as below:

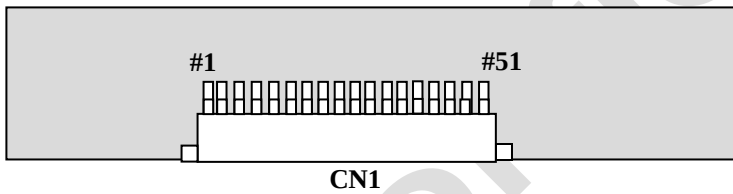


Fig. 4.1 Connector direction sketch map

(2) For CSOT internal only, please let it open.

Attention: Default JEDIA mode

4.2 Converter Unit

4.2.1 Converter Input Connector Pin Definition

CN1: CT000019-143N(FCN) (see 4.2 Note (1))

Pin No.	Symbol	Feature	Note
1	V _{BL}	Power Supply, + 24 V DC Regulated	(1)
2			
3			
4			
5			
6	GND	GND	
7			
8			
9			
10			
11	DET	Normal (0 ~ 0.8 V), Abnormal (Open Collector)	
12	BLON	BLON/OFF	
13	NC	NC	
14	P_DIM	PWM Dimming Control	

Note (1):

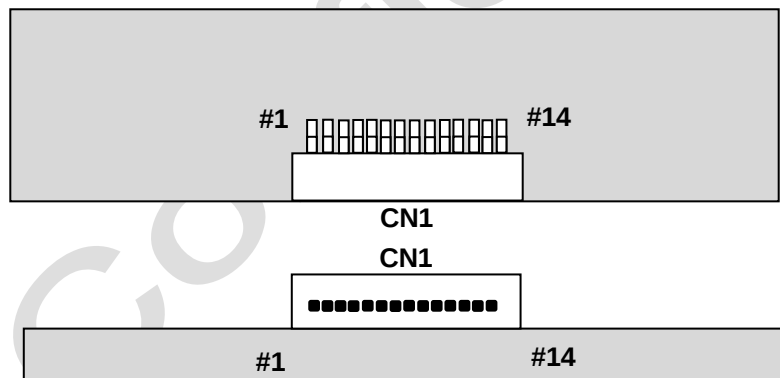


Fig. 4.2 Power input connector direction sketch map

4.3 4K2K Data Format

2D Mode:

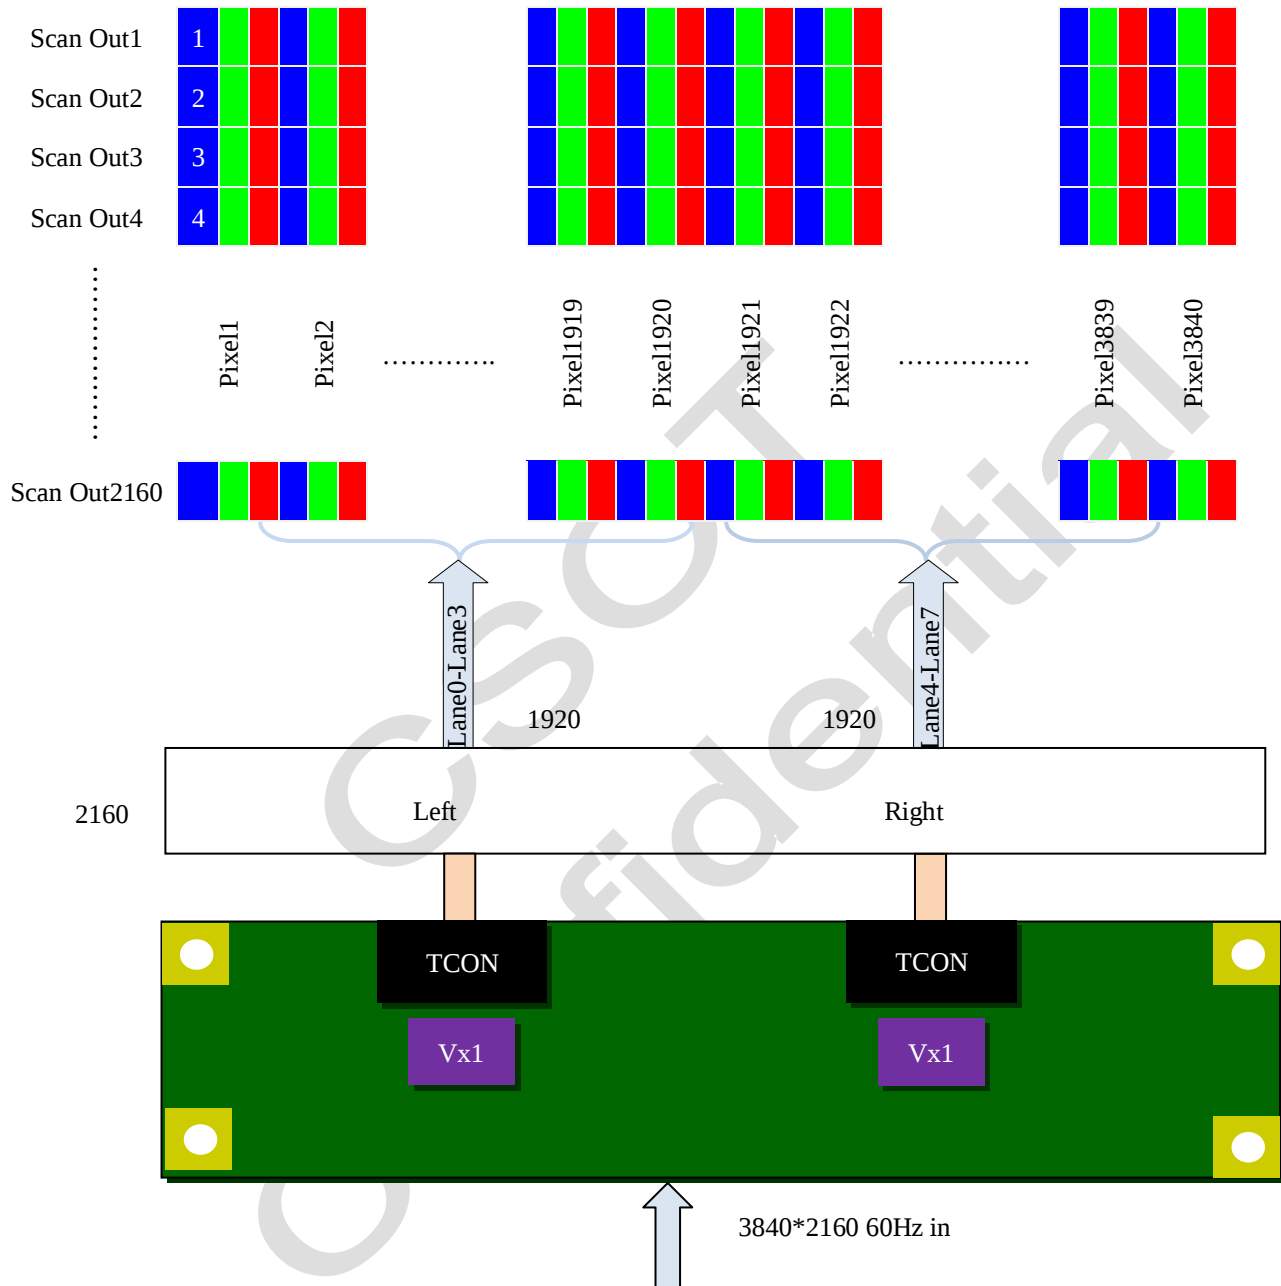


Fig. 4.3 2D data format

3D Mode:

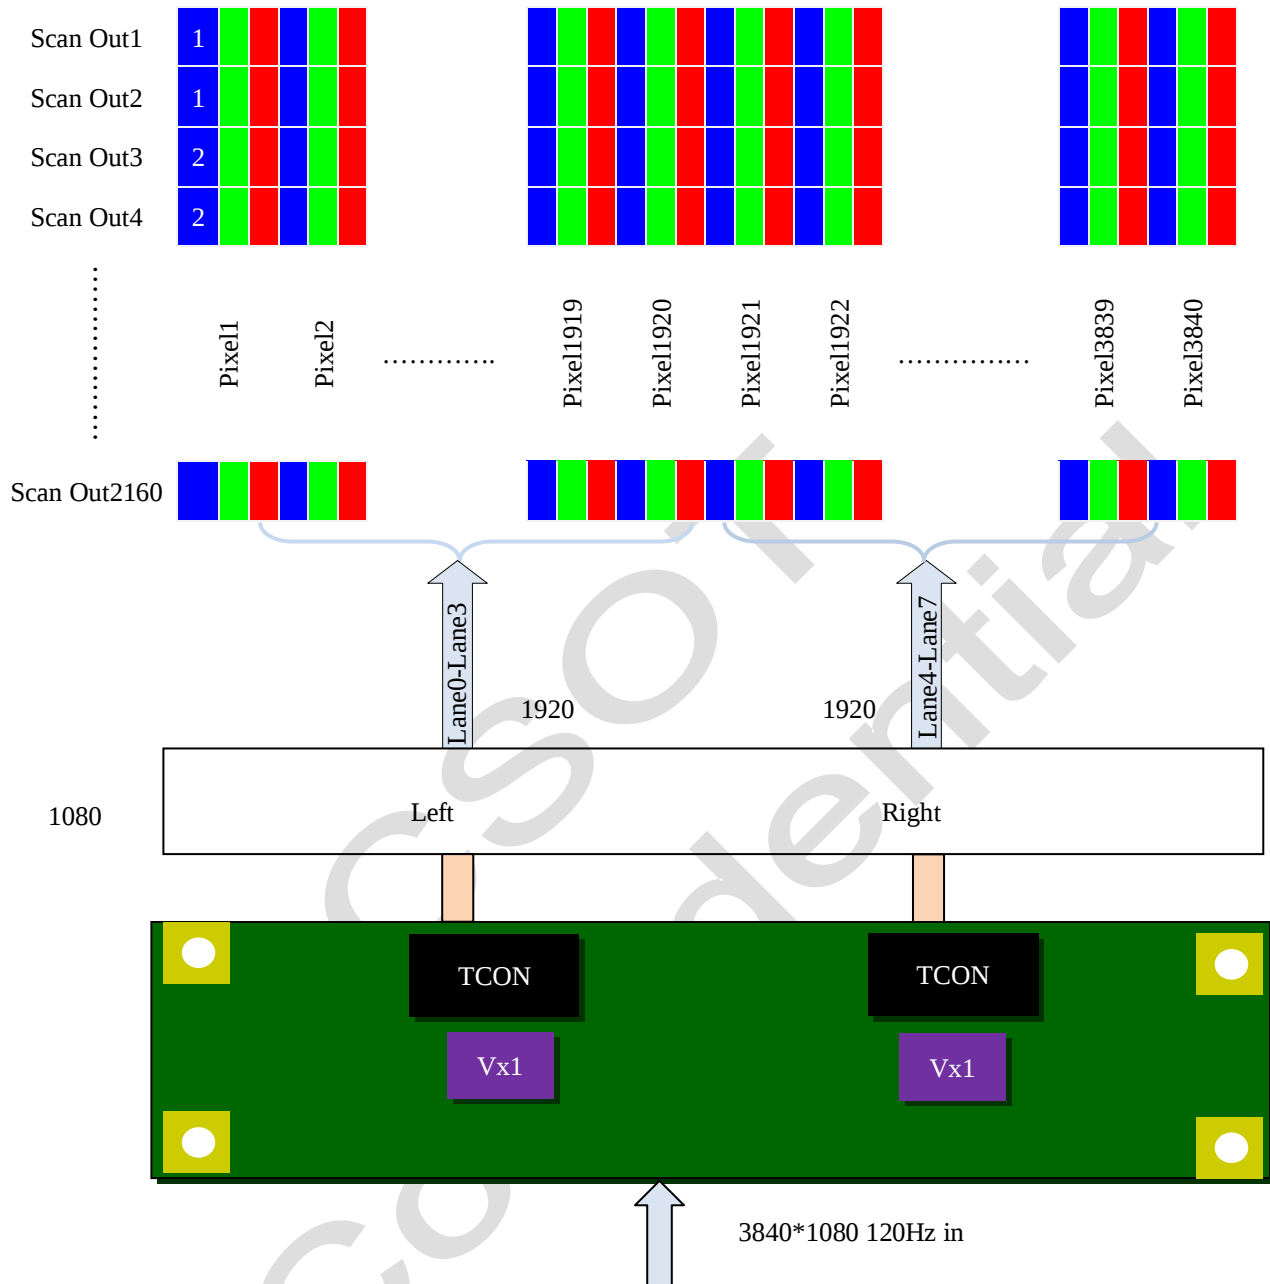


Fig. 4.4 3D data format

4.4 Color Data Input Assignment

The brightness of each primary color is based on the 10-bit gray scale data input for each color. The higher the binary input, the brighter the color. The table below provides the assignment of the color versus.

Data Input Color		Data Signal																																							
		Red										Green										Blue																			
		MSB										LSB										MSB										LSB									
R9	R8	R7	R6	R5	R4	R3	R2	R1	R0	G9	G8	G7	G6	G5	G4	G3	G2	G1	G0	B9	B8	B7	B6	B5	B4	B3	B2	B1	B0												
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0											
	Red (1023)	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0											
	Green (1023)	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0											
	Blue (1023)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1											
	Cyan	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1											
	Magenta	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1										
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0										
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1										
Gray Scale of Red	Red (000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0											
	Red (001)	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0											
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:											
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:											
	Red (1022)	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0											
	Red (1023)	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0										
Gray Scale of Green	Green (000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0											
	Green (001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0											
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:											
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:											
	Green (1022)	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0											
	Green (1023)	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0											
Gray Scale of Blue	Blue (000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0											
	Blue (001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1											
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:											
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:											
	Blue (1022)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0											
	Blue (1023)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1											

Attention:

0: Low level voltage; 1: High level voltage.

5. V-by-One Each Lane Timing Spec

5.1 Timing Table (DE Only Mode)

2D Mode:

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Frequency		F_{CLK} (= 1 / T_{CLK})	-	74.25	-	MHz	(1)
Vertical Term	Frame Rate	F	-	60	-	Hz	
	Total	T_V	-	2250	-	T_H	$T_V = T_{VD} + T_{VB}$
	Display	T_{VD}	2160			T_H	
	Blank	T_{VB}	-	90	-	T_H	
Horizontal Term	Total	T_H	-	550	-	T_{CLK}	$T_H = T_{HD} + T_{HB}$
	Display	T_{HD}	480			T_{CLK}	
	Blank	T_{HB}	-	70	-	T_{CLK}	

3D Mode:

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
Frequency		F_{CLK} (= 1 / T_{CLK})	-	74.25	-	MHz	(1)
Vertical Term	Frame Rate	F	-	120	-	Hz	
	Total	T_V	-	1125	-	T_H	$T_V = T_{VD} + T_{VB}$
	Display	T_{VD}	1080			T_H	
	Blank	T_{VB}	-	45	-	T_H	
Horizontal Term	Total	T_H	-	550	-	T_{CLK}	$T_H = T_{HD} + T_{HB}$
	Display	T_{HD}	480			T_{CLK}	
	Blank	T_{HB}	-	70	-	T_{CLK}	

Attention:

The module is operated in DE only mode, H sync and V sync input signal have no effect on normal operation.

Note:

(1) Please make sure the range of pixel clock follows the following equations:

$$F_{clk}(max) \geq Fr \times T_v \times T_h$$

$$Fr \times T_v \times T_h \geq F_{clk}(min)$$

T_v

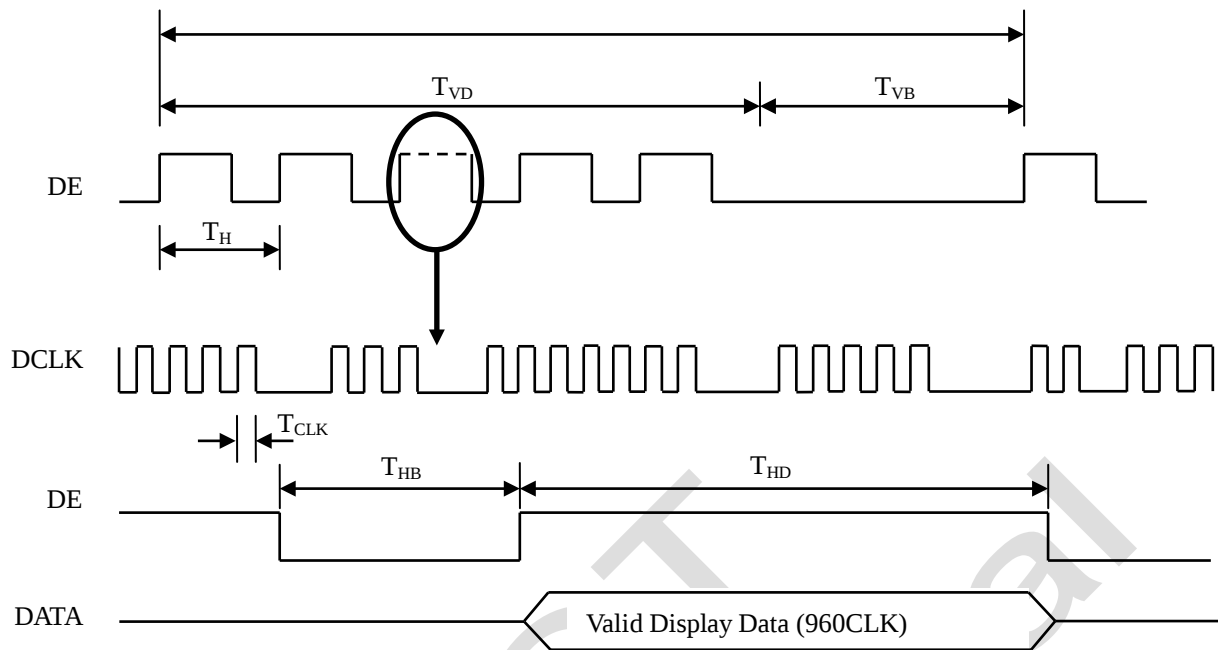


Fig. 5.1 Interface signal timing diagram

5.2 Power On/Off Sequence

5.2.1 Power On/Off Sequence

To prevent a latch-up or DC operation of LCD module, the power on/off sequence should be as the diagram below.

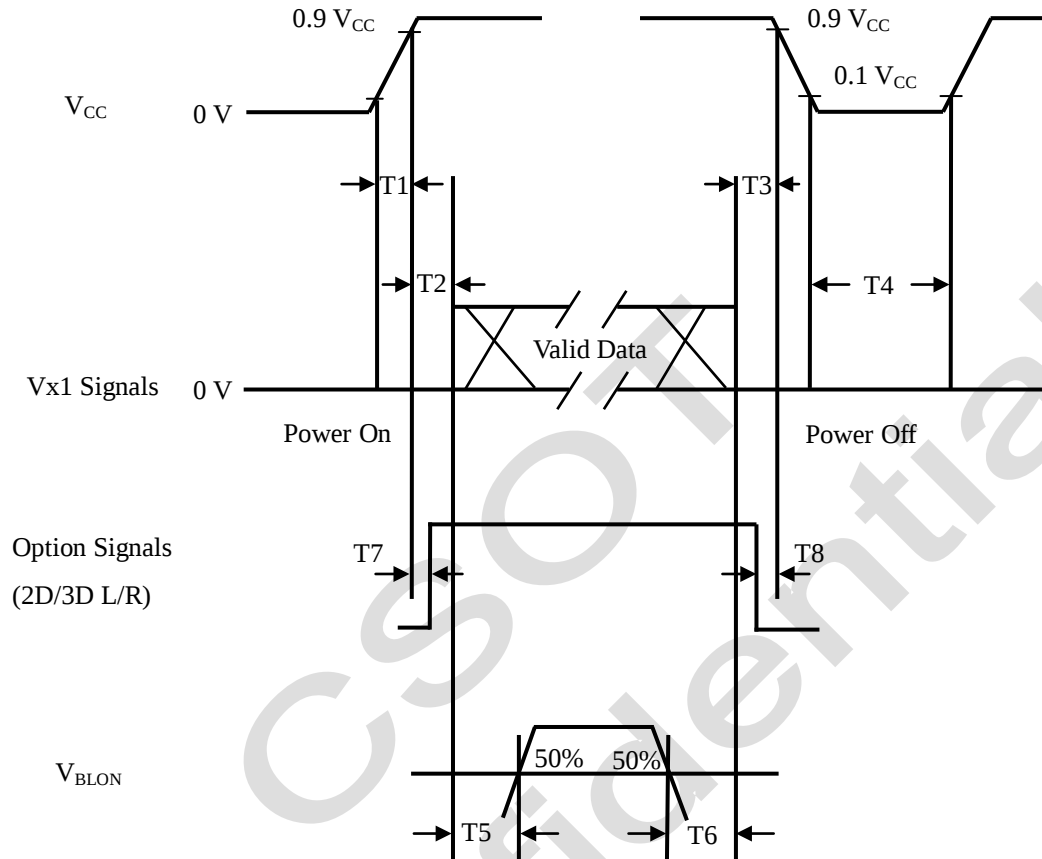


Fig. 5.2 Power on/off sequence

5.2.2 2D / 3D Change Signal Sequence without Vcc Turn off and Turn on

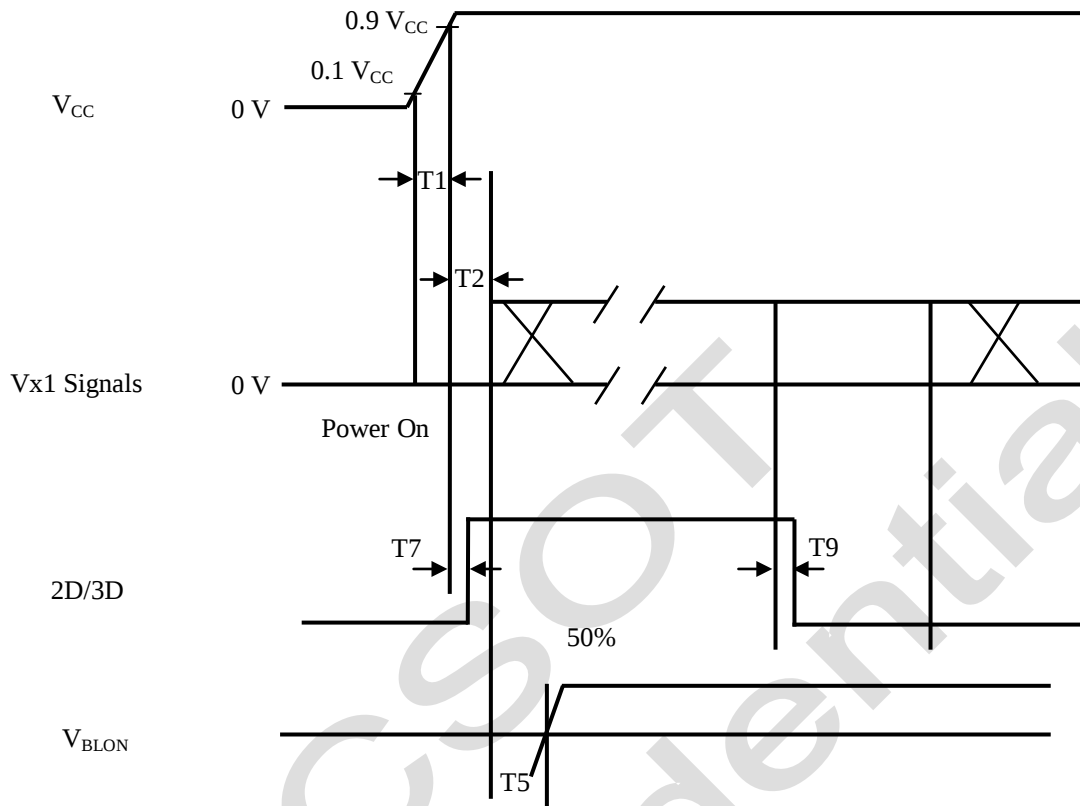


Fig. 5.3 2D/3D power on/off sequence

Parameter	Values			Unit
	Min.	Typ.	Max.	
T1	0.5	-	10.0	ms
T2	0.0	-	-	ms
T3	0.0	-	-	ms
T4	1000	-	-	ms
T5	500	-	-	ms
T6	100	-	-	ms
T7	-	-	T2	ms
T8	-	-	T3	ms
T9	0.0	-	10.0	ms

Attention:

- (1) While system turn from 2D/3D function to 3D/2D function, the V_{BLON} signal should be always high .
- (2) The supply voltage of the external system for the module input should follow the definition of V_{CC}.

- (3) Apply the lightbar voltage within the LCD operation range. When the backlight turns on before the LCD operation or the LCD turns off before the backlight turns off, the display may momentarily become abnormal screen.
- (4) In case that V_{CC} is in off level, please keep the level of input signals on the low or high impedance. If $T_2 < 0$, that may cause electrical overstress.
- (5) T_4 should be measured after the module has been fully discharged between power off and on period.
- (6) Interface signal shall not be kept at high impedance when the power is on.

CSOT
Confidential

6. Optical Characteristics

6.1 Measurement Conditions

The table below is the test condition of optical measurement.

Item	Symbol	Value	Unit
Ambient Temperature	T_A	25 ± 2	$^{\circ}\text{C}$
Ambient Humidity	H_A	50 ± 10	% RH
Supply Voltage	V_{CC}	63	V
Driving Signal	Refer to the typical value in Chapter 3: Electrical Specification		
Light Source Current (Each Unit)	I_L	110	mA
Vertical Refresh Rate	F_R	60	Hz

To avoid abrupt temperature change during optical measurement, it's suggested to warm up the LCD module more than 60 minutes after lighting the backlight and in the windless environment.

To measure the LCD module, it is suggested to set up the standard measurement system as Fig. 7.1. The measuring area S should contain at least 500 pixels of the LCD module as illustrated in Fig. 7.2 (A means the area allocated to one pixel). In this model, for example, the minimum measuring distance Z is 370 mm when θ is 2 degree. Hence, 500 mm is the typical measuring distance. This measuring condition is referred to 301-2H of VESA FPDM 2.0 about viewing distance, angle, and angular field of view definition.

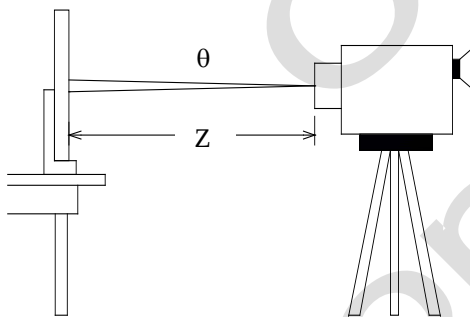


Fig. 6.1 The standard set-up system of measurement

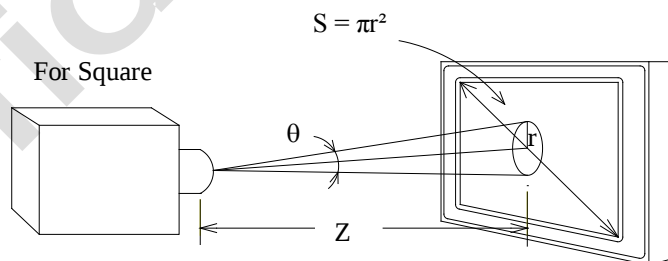


Fig. 6.2 The area S contains at least 500 pixels to be measured

$$N = \frac{S}{A} \geq 500 \text{ pixels}$$

N means the actual number of the pixels in the area S .

6.2 Optical Specifications

The table below of optical characteristics is measured by MINOLTA CS2000, MINOLTA CA310, ELDIM OPTI Scope-SA and ELDIM EZContrast in dark room.

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note	
Static Contrast Ratio		CR	$\theta_H = 0^\circ, \theta_V = 0^\circ$ Normal direction at center point of the LCD module.	-	4000	-	-	(1) (2)	
Response Time		T _L		-	6.5	-	ms	(3) OPTI Scope-SA	
Center Luminance		L _{W-2D}			400	-	cd/m ²	(2) (4)	
		L _{W -3D}		-	50	-	-	(5)	
3D Crosstalk		CT-3D		-	3.5%	-	-	(5)	
Uniformity of White Screen		-		70	75	-	%	(2) (6)	
Color Chromaticity (CIE1931)	Red	R _X		Typ. - 0.03	0.642	Typ. + 0.03	-	(2) (7)	
		R _Y					-		
	Green	G _X					0.327		-
		G _Y					0.626		-
	Blue	B _X	0.157				-		
		B _Y	0.055				-		
	White	W _X	0.280				-		
		W _Y	0.290				-		
	Color Gamut		CG	-	72	-	% NTSC	(2) (7)	
Viewing Angle	Horizontal	θ _{H+}	CR ≥ 10	-	89	-	Deg.	(8)	
		θ _{H-}		-	89	-			
	Vertical	θ _{V+}		-	89	-			
		θ _{V-}		-	89	-			

Note:

(1) Definition of static contrast ratio (CR):

It's necessary to switch off all the dynamic and dimming function when measuring the static contrast ratio.

$$\text{Static Contrast Ratio (CR)} = \frac{\text{CR-W}}{\text{CR-D}}$$

CR-W is the luminance measured by LMD (light-measuring device) at the center point of the LCD module with full-screen displaying white. The standard setup of measurement is illustrated in Fig. 6.3; CR-D is the luminance measured by LMD at the center point of the LCD module with full-screen displaying black.

(2) The LMD in the item could be a spectroradiometer such as (KONICA MINOLTA) CS2000, CS1000, (TOPCON)

SR-UL2 or the same level spectroradiometer. Other display color analyzer (KONICA MINOLTA) CA210, CA310 or (TOPCON) BM-7 could be involved after being calibrated with a spectroradiometer on each stage of a product.

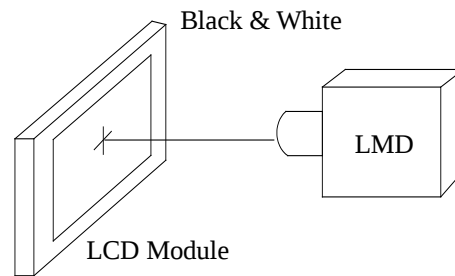


Fig. 6.3 The standard setup of CR measurement

(3) Response time T_L is defined as the average transition time in the response time matrix. The table below is the response time matrix in which each element $t_{X \text{ to } Y}$ is the transition time from luminance ratio X to Y . X and Y are two different luminance ratios among 0%, 25%, 50%, 75%, and 100% luminance. The transition time $t_{X \text{ to } Y}$ is defined as the time taken from 10% to 90% of the luminance difference between X and Y ($X < Y$) as illustrated in Fig6.4. When $X > Y$, the definition of $t_{X \text{ to } Y}$ is the time taken from 90% to 10% of the luminance difference between X and Y . The response time is optimized on refresh rate $F_R = 60\text{Hz}$.

Measured Transition Time		Luminance Ratio of Previous Frame				
		0%	25%	50%	75%	100%
Luminance Ratio of Current Frame	0%		$t_{25\% \text{ to } 0\%}$	$t_{50\% \text{ to } 0\%}$	$t_{75\% \text{ to } 0\%}$	$t_{100\% \text{ to } 0\%}$
	25%	$t_{0\% \text{ to } 25\%}$		$t_{50\% \text{ to } 25\%}$	$t_{75\% \text{ to } 25\%}$	$t_{100\% \text{ to } 25\%}$
	50%	$t_{0\% \text{ to } 50\%}$	$t_{25\% \text{ to } 50\%}$		$t_{75\% \text{ to } 50\%}$	$t_{100\% \text{ to } 50\%}$
	75%	$t_{0\% \text{ to } 75\%}$	$t_{25\% \text{ to } 75\%}$	$t_{50\% \text{ to } 75\%}$		$t_{100\% \text{ to } 75\%}$
	100%	$t_{0\% \text{ to } 100\%}$	$t_{25\% \text{ to } 100\%}$	$t_{50\% \text{ to } 100\%}$	$t_{75\% \text{ to } 100\%}$	

$t_{X \text{ to } Y}$ means the transition time from luminance ratio X to Y .

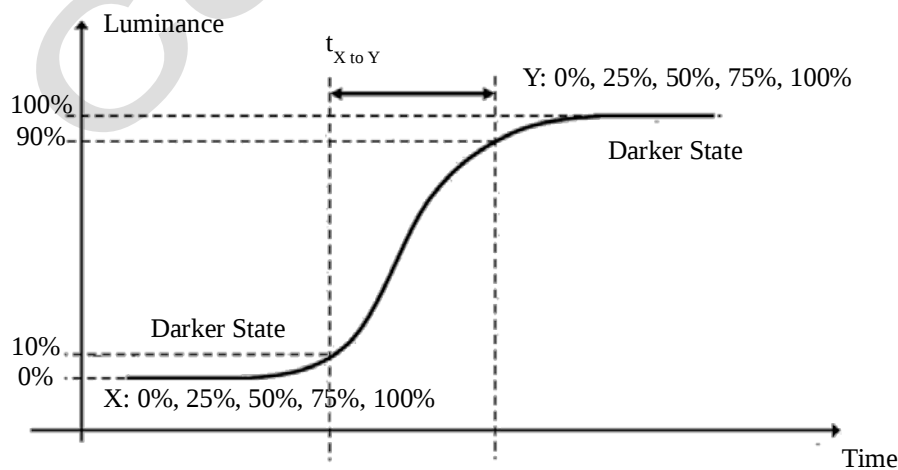


Fig. 6.4 The definition of $t_{X \text{ to } Y}$

All the transition time is measured at the center point of the LCD module by ELDIM OPTI Scope-SA.

(4) Definition of center luminance (L_w):

The luminance is measured at the center point of the LCD module with full-screen displaying white. Fig. 6.5 shows the standard setup of luminance measurement.

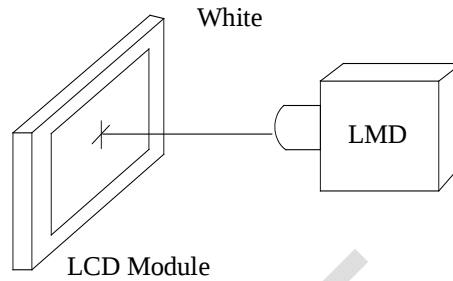


Fig. 6.5 The standard setup of luminance measurement

(5) Definition of the 3D mode performance:

Test pattern

Pattern	Left eye image	Right eye image	remark
WW			Left eye image: L255 Right eye image: L255 L(WW) is denoted as the luminance of "WW"
WB			Left eye image: L255 Right eye image: L0 L(WB) is denoted as the luminance of "WB"
BW			Left eye image: L0 Right eye image: L255 L(BW) is denoted as the luminance of "BW"
BB			Left eye image: L0 Right eye image: L0 L(BB) is denoted as the luminance of "BB"

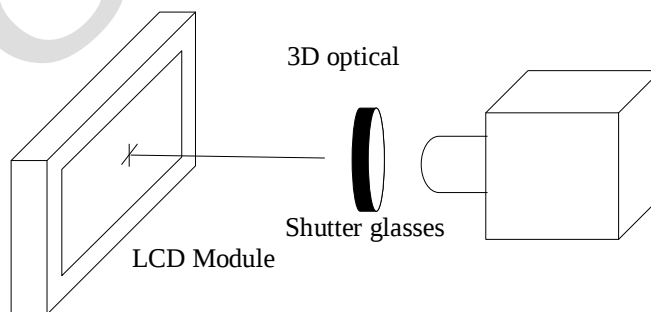


Fig. 6.6 3D optical measurement system

Measure the center point of the LCD module through the shutter glasses under 3D mode operation.

The 3D luminance (L_{w-3D}) is the luminance measured by LMD with well controlled shutter glasses at the center point of the LCD module with test pattern L(WW).

The 3D crosstalk is measured at the center point of the LCD module through right-eye glasses..

Definition of the 3D mode crosstalk: $CT-3D = \frac{L(WB)-L(BB)}{L(BW)-L(BB)}$

(6) Definition of uniformity of white screen:

The luminance L_i (i from 1 to 9) is measured at the 9 points defined in Fig. 6.7. H and V indicate active area.

From the measured set of luminance values L_i (i from 1 to 9), the minimum luminance is denoted as L_{min} and the maximum luminance is denoted as L_{max} . The uniformity of white screen is defined according to

Uniformity = $L_{min} / L_{max} \times 100\%$.

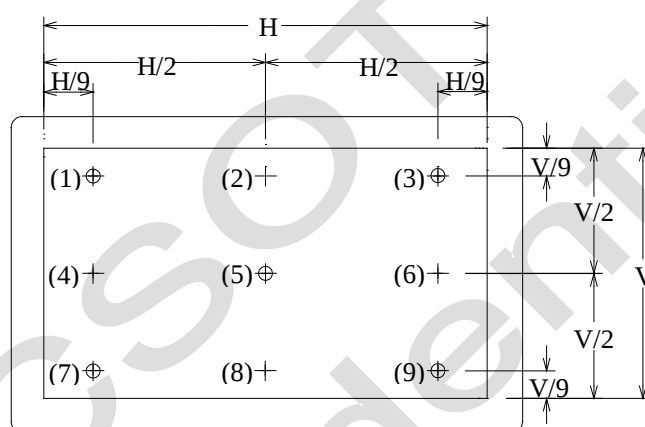


Fig. 6.7 Symbol “+” defines the 9 measuring locations (1), (2), (3) ... (9)

(7) Definition of color chromaticity:

Each chromaticity coordinates (x , y) are measured in CIE1931 color space when full-screen displaying primary color R, G, B and white. The color gamut is defined as the fraction in percent of the area of the triangle bounded by R, G, B coordinates and the area is defined by NTSC 1953 color standard in the CIE color space. Chromaticity coordinates are measured by CS2000 and the standard setup of measurement is shown in Fig. 6.8.

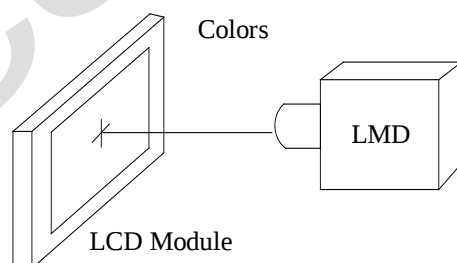


Fig. 6.8 The standard setup of color chromaticity measurement

(8) Definition of viewing angle coordinate system (θ_H , θ_V):

The contrast ratio is measured at the center point of the LCD module. The viewing angles are defined at the angle that the contrast ratio is larger than 10 at four directions relative to the perpendicular direction of the LCD module (two vertical angles:

up θ_{V+} and down θ_{V-} ; and two horizontal angles: right θ_{H+} and left θ_{H-}) as illustrated in Fig. 6.9. The contrast ratio is measured by ELDIM EZ Contrast.


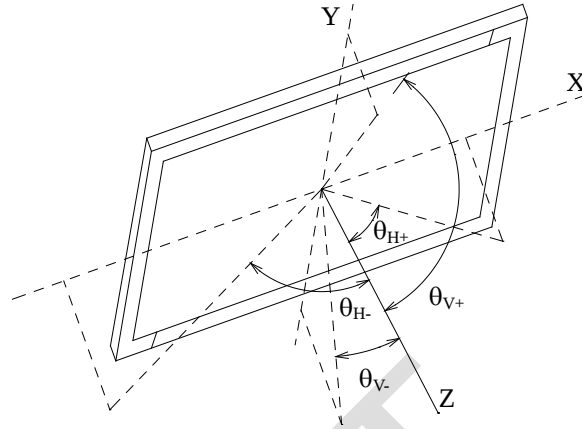


Fig. 6.9 Viewing angle coordination system

7. Mechanical Characteristics

7.1 Mechanical Specification

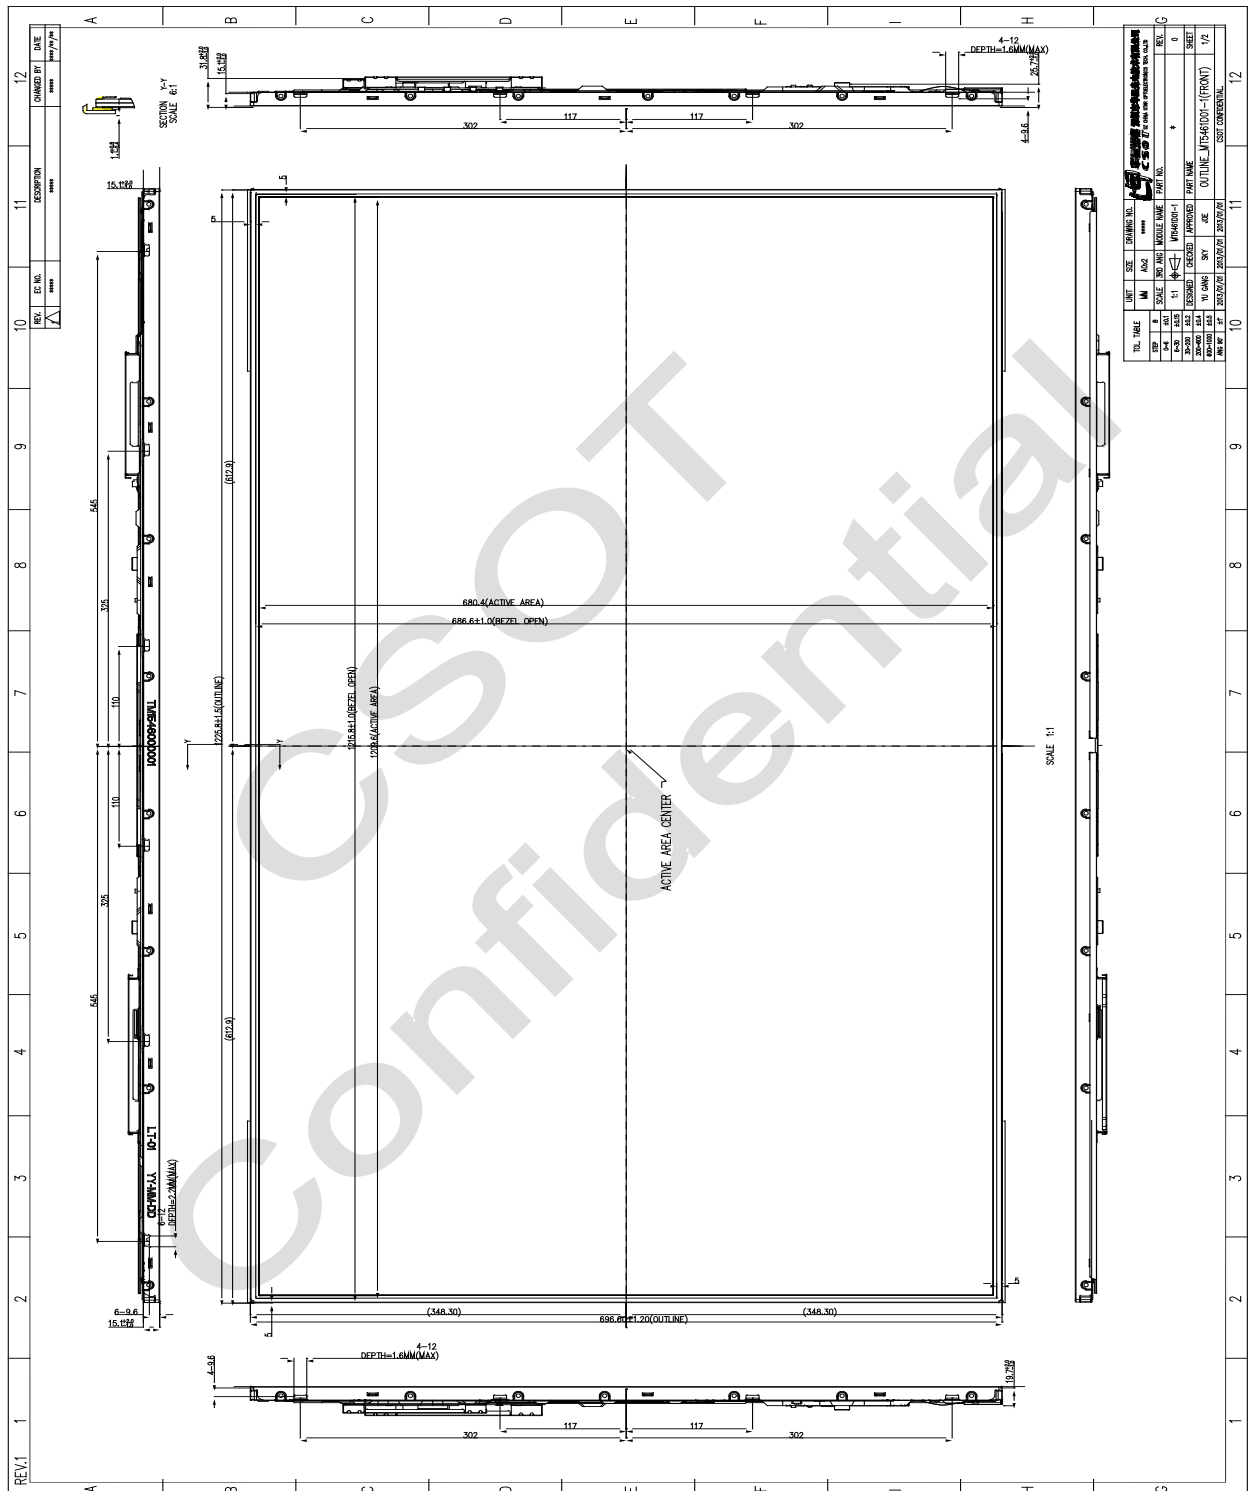

7.2 Packing

7.2.1 Packing Specifications

Item	Specification		
	Quantity	Dimension (mm)	Weight (kg)
Packing Box	5 pcs / box	1357.0 (L) x 365.0 (W) x 798.0 (H)	Net Weight: 80.0 Gross Weight:88.7
Pallet	1	1420 (L) x 1120 (W) x 150 (H)	Net Weight:32
Stack Layer	1		
Boxes per Pallet	3 boxes / pallet		
Pallet after Packing	15 pcs / pallet	1420 (L) x 1120 (W) x951(H)	Gross Weight: 299

7.2.2 Packing Method

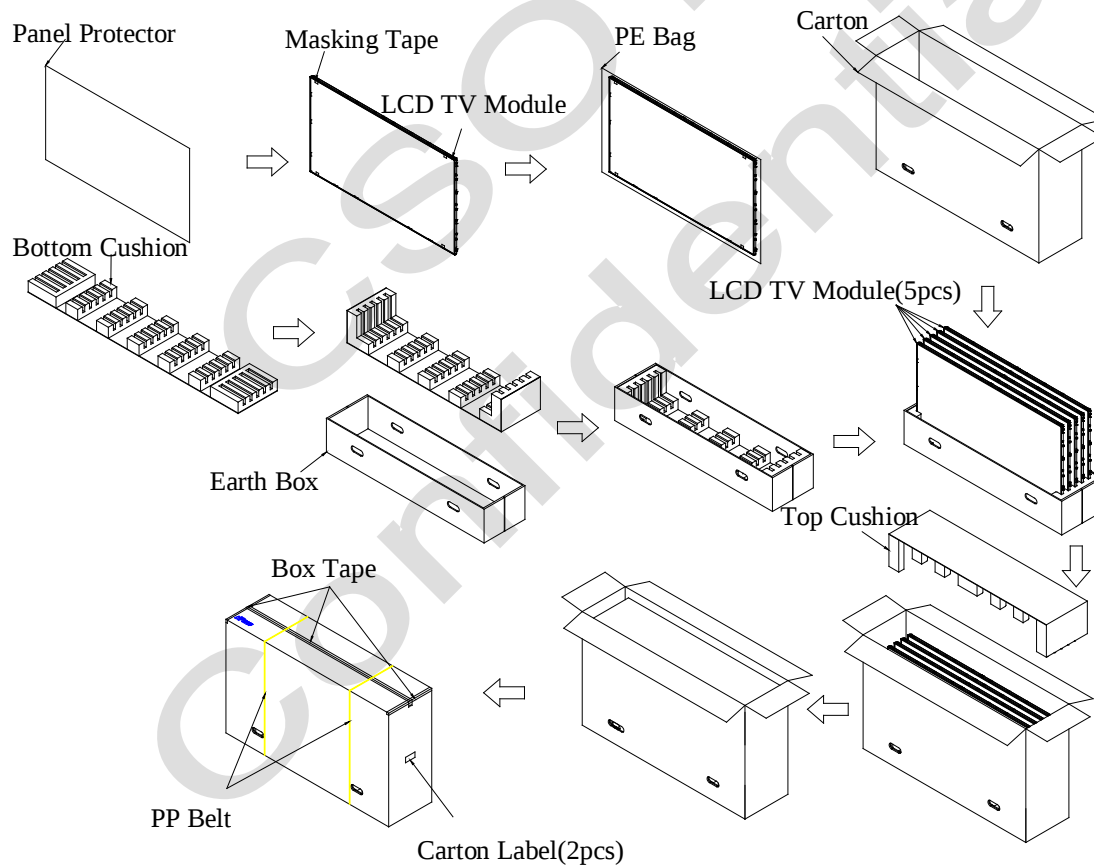


Fig. 7.1 Packing method (protector film stick on the front of the LCD module)


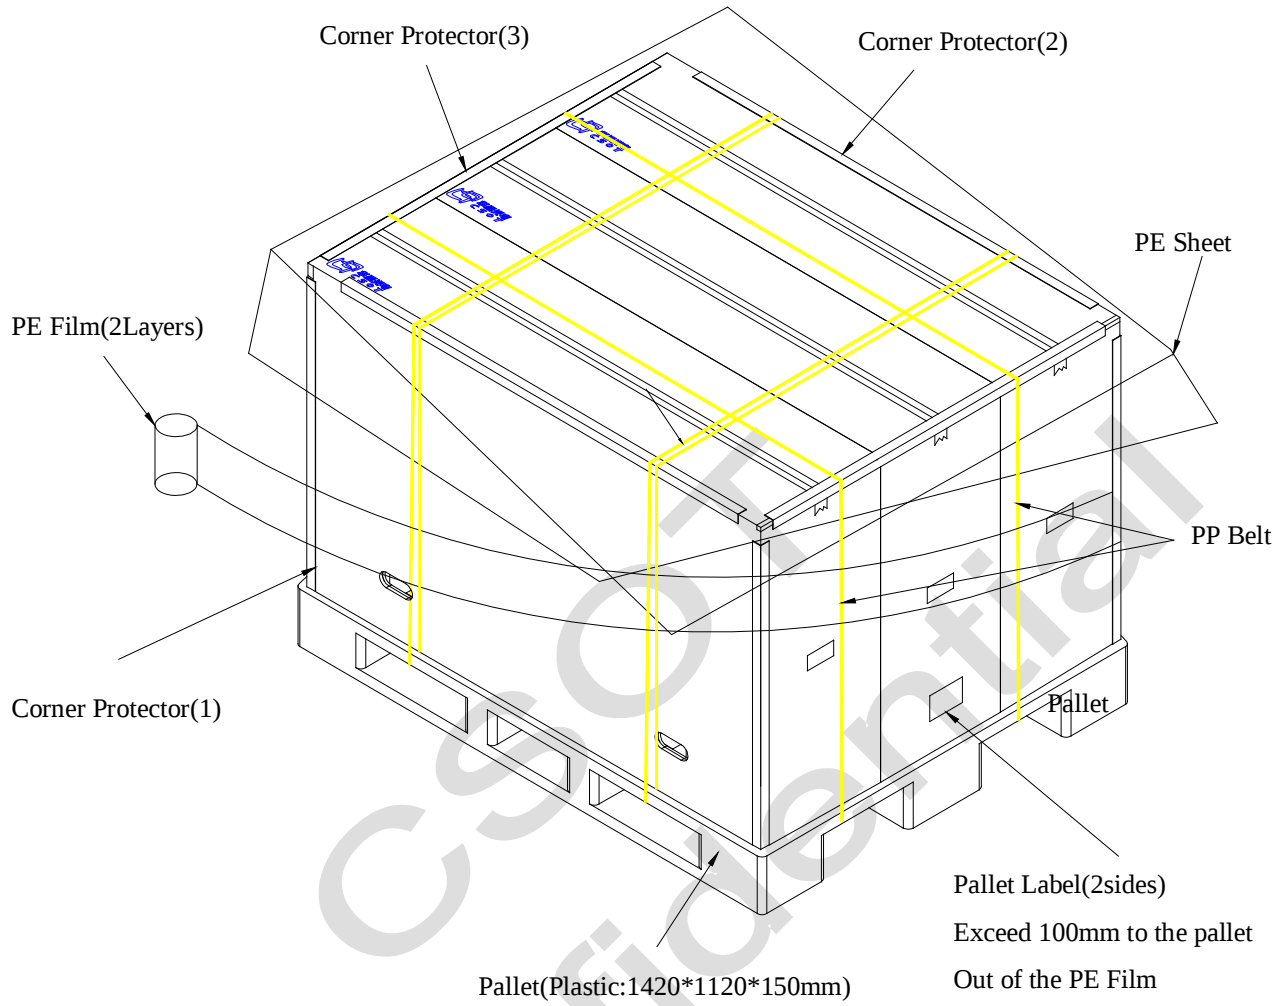


Fig. 7.2 Shipping method

8. Definition of Labels

8.1 Module Label

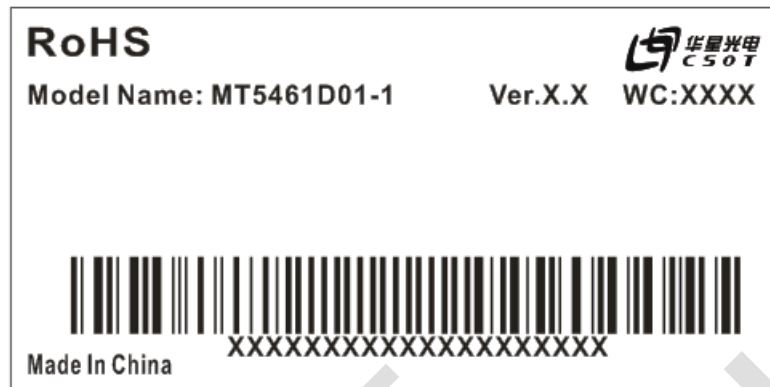


For RoHs compatible products, CSOT will add RoHS for identification.

Model Name: MT5461D01-1

Ver.X.X: Version, for example: 0.1, 0.2, ..., 1.1, 1.2, ..., 2.1, 2.2, ...

WC (Week Code): XX XX




Year: 2010 = 10, 2011 = 11 ... 2020 = 20, 2021 = 21...

Week: 01, 02, 03 ...

Serial Number: XXXXXXXXXXXX XXXXXXXXXX




8.2 Carton Label

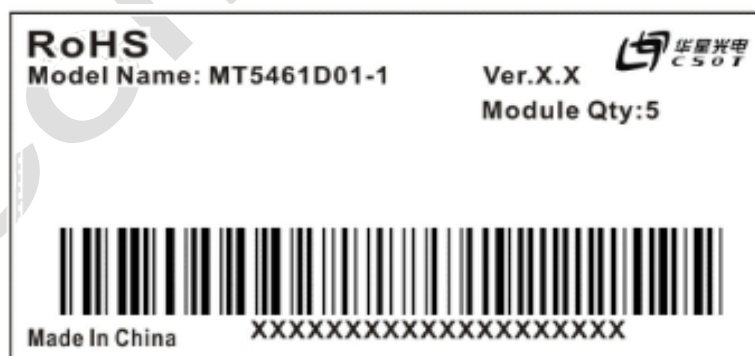

Model Name: MT5461D01-1

Serial Number: XXXXXX XX XXXXXX XXXXXX

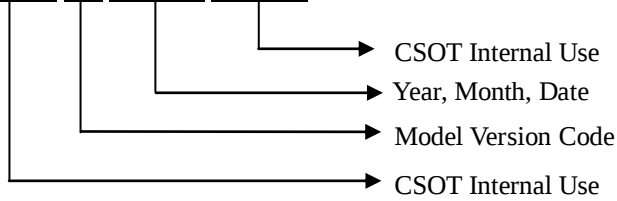

Manufactured Date:

Year: 2010 = 10, 2011 = 11...2020 = 20, 2021 = 21...

Month: 1~9, A~C, for Jan. ~ Dec.

Date: 01~31, for 1st to 31st


Model Version Code: Version of product, for example: 01, 02, 11, 12...

8.3 Pallet Label



Model Name: MT5461D01-1

Serial Number: XXX XX XXX XXXXXX

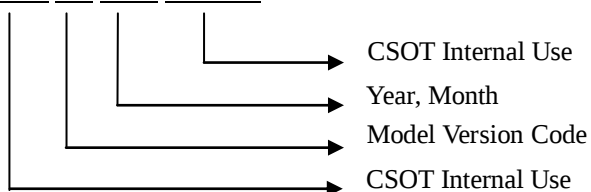

9. Precautions

9.1 Assembly and Handling Precautions

- (1) Do not apply rough force such as bending or twisting to the LCD module during assembly.
- (2) It is recommended to assemble or install a LCD module into the user's system in clean working areas. The dust and oil may cause electrical short or damage the polarizer.
- (3) Do not apply pressure or impulse to the LCD module to prevent the damage to LCD panel and backlight.
- (4) Always follow the correct power-on sequence. This can prevent the damage and latch-up to the LSI chips.
- (5) Do not plug in or pull out the interface connector while the module is in operation.
- (6) Do not disassemble the LCD module.
- (7) Use soft dry cloth without chemicals for cleaning because the surface of polarizer is very soft and easily be scratched.
- (8) Moisture can easily penetrate into the LCD module and may cause the damage during operation.
- (9) High temperature or humidity may deteriorate the performance of the LCD module. Please store LCD modules in the specified storage conditions.
- (10) When ambient temperature is lower than 10 ℃, the display quality might be deteriorated. For example, the response time will become slow, and the starting voltage of LED light bar will be higher than that in room temperature.

9.2 Safety Precautions

- (1) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contact with hands, skin or clothes, it has to be washed away thoroughly with soap.
- (2) After the LCD module's end of life, it is not harmful in case of normal operation and storage.